

HYDRAULIC SCISSOR
COMMERCIAL LIFT

*Great performance and the perfect choice
for your commercial service.*




AX-12

AX-12A

SPECIFICATIONS

Model		AX-12	AX-12A
Style		Non-Alignment	Alignment
Lifting Capacity		12,000lbs (5500kg)	12,000lbs (5500kg)
Lifting Time		74S	74S
Lifting Height	A1	73 5/8" (1870mm)	73 5/8" (1870mm)
Minimum Height	A2	11 3/4" (300mm)	11 3/4" (300mm)
Runway Length	B	197 1/2" (5018mm)	197 1/2" (5018mm)
Overall Width	C	90 1/8" (2290mm)	90 1/8" (2290mm)
Runway Width	D	24 5/8" (625mm)	24 5/8" (625mm)
Overall Length(Inc Ramps)	E	267 1/8" (6784mm)	258" (6554mm)
Motor		2.0HP,220V/60Hz,single phase	
Gross Weight		4,749lbs (2154kg)	5,326lbs (2416kg)

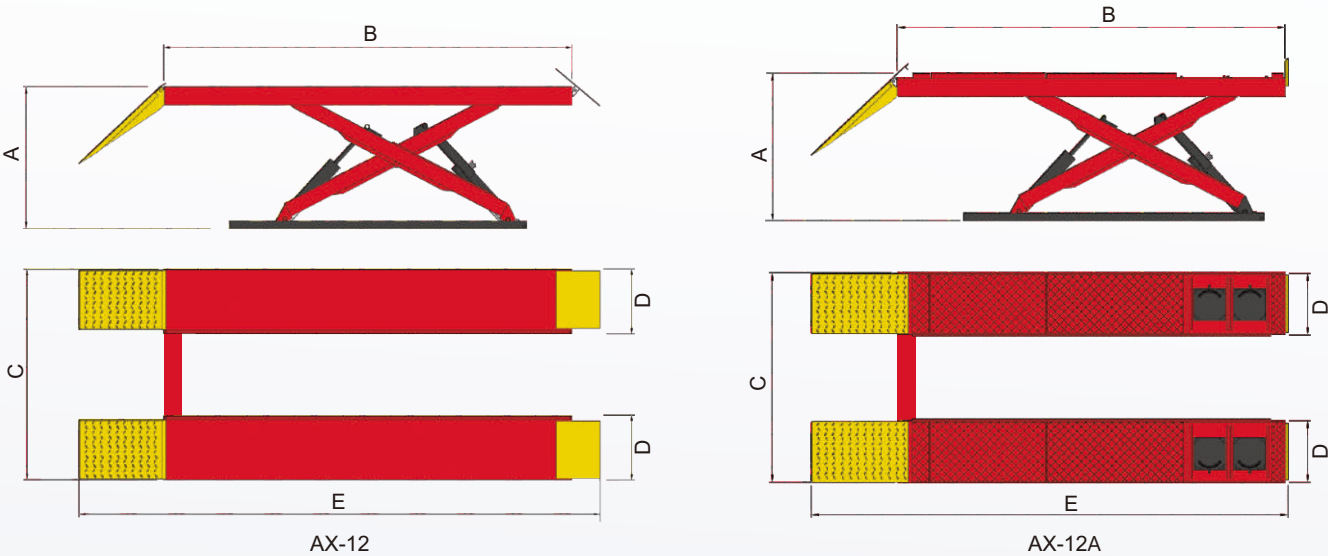

AMGO HYDRAULIC CORPORATION

1931 Joe Rogers Jr Blvd, Manning, SC 29102, USA
Tel: (803)505-6410 www.amgohyd.com

HYDRAULIC SCISSOR ALIGNMENT LIFT

This heavy-duty scissor lift has the support of four cylinders and each dual cylinder are designed to work synchronously.

- ✓ 2 dual synchronous cylinders are used to assure the optimal lifting level on both platforms.
- ✓ Electronic-air control system, which operates the self-locking safety mechanism.
- ✓ Heavy-duty design, the X serial scissor lift uses a 5 7/8" x 3" (150 x 75mm) tube to make it strong and assures the runways remain level during operation.
- ✓ Skid proof diamond platform provides traction for the tires to stay put.
- ✓ Optional rolling jacks:
 - J6H: 6,000 lbs with manual control
 - J6A: 6,000 lbs with pneumatic pump
- ✓ More choices:
 - Optional turnplate Kit: No. 40101 (AX-12A)
 - Optional led lights Kit: No. 40103
 - Optional extension Kit: No. PX001 (AX-12)/PX002 (AX-12A)
 - Optional airline Kit: No. PX004



FEATURES




- Mechanical lock and air-driven safety release.



- Pull-out shelf for extra room during service.



- Optional LED lights provide extra and efficient lighting for underneath the vehicle.

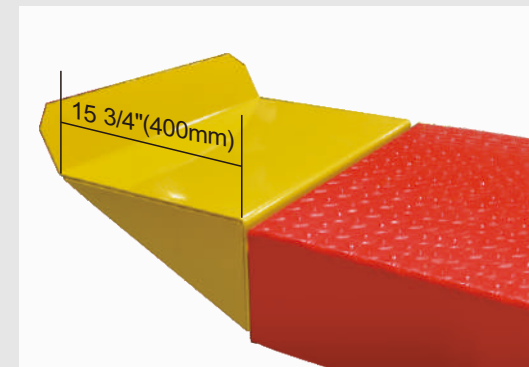

- Optional extension kit to extend the platform 15 3/4" (400mm).



- Optional airline kits. Easy and convenient installation for all models of rolling jacks with a pneumatic pump.