

TWO POST BASE PLATE LIFT

Enjoys most features as BP-9, BP-9X is more advanced to construct wider, taller and stronger. The reinforced structure enhances lifting reliability, providing convenient service for a vast range of vehicles. The base plate design can be installed in any workshops or garages over 9.5ft height.



BP-9X

TWO POST LIFT

Main Features

- ✓ 9,000 lbs Capacity.
- ✓ Dual hydraulic chain-drive cylinders manufactured on high standard.
- ✓ 4 three-stage arms are suitable for more vehicles.
- ✓ Aero cable used for synchronization.
- ✓ Self-lubricating UHMW Polyethylene sliders and bronze bushings.
- ✓ Single-point safety release allows technician to easily release both column locks from one column.
- ✓ Automatic arm restraints.
- ✓ Stackable rubber pad with 1.5", 2.5" and 5" extension.



Single-point safety release makes it easier for operators to unlock both column locks from one column.



Two locks, one release.
Only available from AMGO.



The optional saddle adapter.
Kits No. for light truck: 20802.



The stackable rubber pads package with 1.5", 2.5", 5" extension adapters.




Automatic arms restraints and release.



4 three-stage arms are suitable for more vehicles.

SPECIFICATIONS

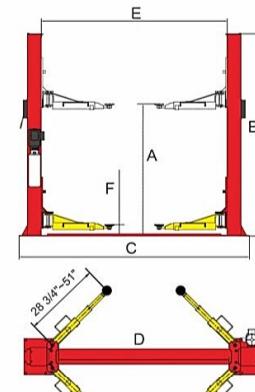

| Model | BP-9X |
|--|--------------------------------|
| Lifting Capacity | 9,000 lbs |
| Lifting Time | 49s |
| Max. Lifting height: (w/o extension adapter) | 77" |
| Max. Lifting height: (w/ extension adapter) | 86" |
| A Max. lock height: (w/o extension adapter) | 75 3/8" |
| Max. lock height: (w/ extension adapter) | 84 3/8" |
| B Overall Height | 111 7/8" |
| C Overall Width | 136 1/4" |
| D Drive-Thru Clearance | 100 3/4" |
| E Width Between Columns | 112 1/4" |
| F Minimum Pad Height | 3 3/8" |
| Gross Weight | 1,581 lbs |
| Motor | 2.0HP, 220V 60Hz, single phase |

AMGO HYDRAULIC CORPORATION

SC Division: 1931 Joe Rogers Jr Blvd, Manning, SC 29102, USA

Tel: (803)505-6410

TX Division: 4310 Adler, Suite 200, Dallas, TX 75211, USA

Tel: (214)377-7742