

TWO-POST HEAVY-DUTY LIFTS

OH-15 stands out in the AMGO lineup for its exceptional heavy lifting capabilities. Built with a heavy-duty construction and furnished with stackable rubber pads and heavy-duty saddle adapters as standard, it fulfills diverse lifting needs from vans, commercial vehicles to heavy-duty trucks. It also incorporates AMGO's 3 in 1 technology, simplifying installation and providing three significantly tall height settings to accommodate different vehicles.



OH-15

Main Features

- ✓ 15,000 lbs capacity.
- ✓ Single-point safety release.
- ✓ 4 two-stages arms allowing to lift the trucks from short to long wheel base.
- ✓ Automatic arm restraints keep the arms locked in their proper positions.
- ✓ Self-lubricating UHMW Polyethylene sliders and bronze bushings.
- ✓ Adjustable two height setting accommodate varying service ceiling heights.
- ✓ Aircraft quality cable is used for synchronization.
- ✓ Detachable foot guard and tool tray to allow for a clutter free work space.
- ✓ Five-year Warranty on Steel Components,
Three-year Warranty on Hydraulic Parts and
Two Years on Electrical Components.




Single point safety release makes it easier for operators to unlock both columns from one column.



Hydraulic Direct-driven Cylinders.



Both stackable rubber pads and heavy duty saddle adapter are include as standard.



1.5", 2.5", and 5" extension adapters are included as standard.




Automatic arm restraints



Equipped with extremely long carriages to enhance the stability.

SPECIFICATIONS

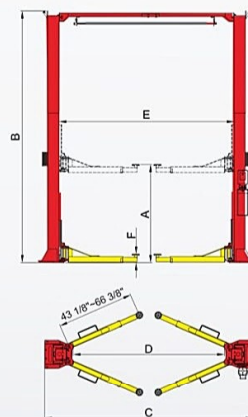

Model	OH-15
Lifting Capacity	15,000 lbs
Lifting Time	84s
Max. Lifting height: (w/o extension adapter)	75 1/4"
Max. Lifting height: (w/ extension adapter)	84 1/4"
Max. lock height: (w/o extension adapter)	A 73 5/16"
Max. lock height: (w/ extension adapter)	82 5/16"
Overall Height:(low setting)	174"
Overall Height:(Medium setting)	B 186"
Overall Height:(High setting)	198"
Overall Width	C 150 3/4"
Drive-Thru Clearance	D 109 3/4"
Width Between Columns	E 123 1/2"
Minimum Pad Height	F 7 1/4"
Gross	2,394 lbs
Motor	2.0HP,2.0HP,220V 60Hz,single phase

AMGO HYDRAULIC CORPORATION

SC Division: 1931 Joe Rogers Jr Blvd, Manning, SC 29102, USA
Tel: (803) 505-6410

TX Division: 4310 Adler, Suite 200, Dallas, TX 75211, USA
Tel: (214) 377-7742