


The WB-953-TASK and the WB-CB-6-TASK Truck Adapter Spacer Kit consists of an aluminum shaft centric spacer and a double sided cone for use with 3/4T and 1T and Dually Wheels. The aluminum spacer typically allows correct mounting of deep dually wheels. The double sided cone allows for maximum cone penetration for mounting 3/4T and single axle 1T wheels. In addition the double sided cone goes to an industry standard 6 7/8".

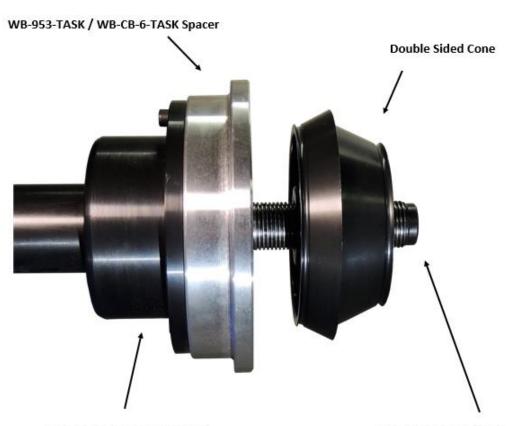

Wheel Balancer Hub/Flange

Wheel Balancer Shaft

Specifications		
	WB-953-TASK	WB-CB6-TASK
Spacer ID	7 1/4"	7 1/4"
Spacer OD	8 5/8"	8 5/8"
Spacer Center Hole	36MM	40MM
Spacer Offset	1 3/4"	1 3/4"
Cone Range Small Side	4 7/8" to 6 1/8"	4 7/8" to 6 1/8"
Cone Range Large Side	6" to 6 7/8"	6" to 6 7/8"