

CEMB[®] USA



SM56T

A heavy-duty off-road tractor tire changer with wheel clamping range from 14"-46" maximum tire diameter of 90" and maximum tire width 42". Perfectly suited for tube and tubeless tires used on heavier off-road farm and commercial use tractors.

(678) 717-1050 • www.cemb-usa.com • 2873 Ramsey Road, Gainesville, Georgia



SM56T

☛ Portable Control Unit

☛ Farm & Commercial Tractors

☛ Bi-Directional Clamping

☛ Pivoting Four-Jaw Clamping

☛ Adjustable Bead Loosening Roller

☛ Self-Centering Wheel Clamping




Standard Accessories



Bead Lifting Lever
511242




Bead Lifting Guide Lever
DB12T



Alloy Rim Pliers
YC8F20000

DIMENSIONS

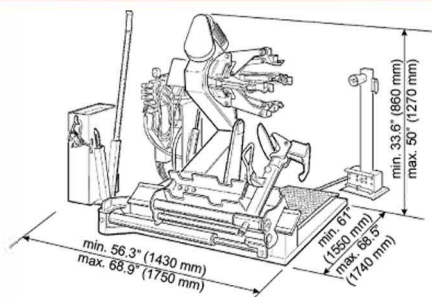

Power Supply: 220V, 3 ph
Air Pressure: 0 - 1885 psi (0-130 bar)
Rim Diameter (Ext.): 14" - 46"
Tire Diameter: 90.5" (2300 mm)
Max. Wheel Width: 42" (1067 mm)
Bead Breaker Force: 6000 lbs. (2721 Kg)
Shipping Weight: 2000 lbs. (907 Kg)

CONTACT

CEMB[®] USA

CEMB USA - BL Systems Inc.
2873 Ramsey Road, Gainesville, GA 30501
(678) 717-1050 - sales@cemb-usa.com
www.cemb-usa.com