


41 inch Powder Coated Steel Top Chest

Model: RX412508CH

Extreme Tools, Inc. 740 Frontenac Rd. Naperville, Illinois 60563 6330.369.9303 www. ExtremeTools.net

TOP CHEST PARTS LIST RX412508CH

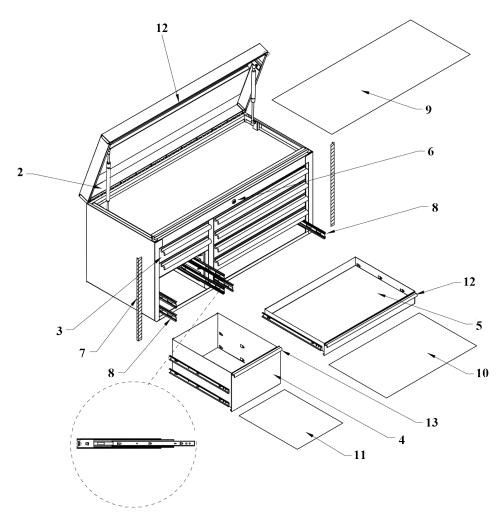

•

Replacement keys may be ordered using the code that appears on the face of the lock.

To order replacement parts, have the part number, tool box color and quantity ready. If under warranty, the serial number is REQUIRED to get replacement parts.

Not all parts are available under warranty and may be purchased separately.

RX412508CH TOP CHEST PARTS LIST

Item	Part number	Descriptions	Qty
		Strut for lid support on the RX412508CH,	
2	ZST350110M6	DX412504CH (11KG).	2
		RX41 drawer #2, 25" deep, 100# slide, Black	
3	ZDRR324E1QWKC	w/Chrome drawer pull	2
		RX41 drawer #2, 25" deep, 100# slide, Blue	
3	ZDRR324E1QWUC	w/Chrome drawer pull	2
		RX41 drawer #3, 25" deep, 100# slide, Black	
4	ZDRR324E3QWKC	w/Chrome drawer pull	1
		RX41 drawer #3, 25" deep, 100# slide, Blue	
4	ZDRR324E3QWUC	w/Chrome drawer pull	1
		RX41 drawer #5, 25" deep, 100# slide, Black	
5	ZDRR594E1QWKC	w/Chrome drawer pull	5
		RX41 drawer #5, 25" deep, 100# slide, Blue	
5	ZDRR594E1QWUC	w/Chrome drawer pull	5
6	Z-LK EX01-04	EX01-EX04 Mix lock sets	1
		RX41 chest vertical trim, 564mm, AL, Left=Right,	
7	ZTRRX564-CR	Chrome	2
8	ZSLW530F520	100 lb. Drawer Slide set	9 sets
9	ZDL924X559 PVC	Drawer liner, large, 924x559, PVC, Black	1
10	ZDL567X559 PVC	Drawer liner, med, 567x559, PVC, Black	5
11	ZDL297X559 PVC	Drawer liner, small, 297x559, PVC, Black	3
		Liner kit, 1 large, 5 midium & 3 small (For re-order	
	Z-DL412508CH-Kit	purpose)	1 set
12	ZDPRX960-CR	RX41 Chest lid pull, 960 mm, Chrome for RX41	1
		RX drawer pull assy, 594 mm, Chrome, DDT for	
12	ZDPQRX594-CR	RX41	5
		RX drawer pull assy, 324 mm, Chrome, DDT for	
13	ZDPQRX324-CR	RX41	3
	Z-LGS	Extreme Tools name plate	1
	Z-ECRX	RX Plastic End Cap	2
	ZM8BTHX-16	M8X16 Hex Bolts for securing chest to cabinet	2
	ZM4MSPH-6	M4 X 6 MM Pan Head Mach. Screw for lid pull	7
	Z-DTEX56	Detents for slides (come with slides)	18


ASSEMBLY

Securing Top Chest and Roller Cabinet


Place the chest on the cabinet. Open the top drawer and locate the two holes under the top surface of the roller cabinet.


Place one flat washer on each of (2) M8 x 16mm hex bolts. (Included with Top Chest)

Insert hex bolt with washer up through the hole of the roller cabinet and into the hole on the bottom side of the top chest. Tighten securely.

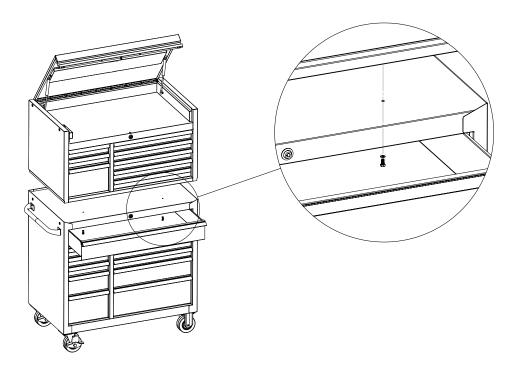

OPERATING PROCEDURE





Drawer Removal

Pull drawer out so that it is almost fully extended.

Push up on the black lever on one drawer slide and at the same time push down on the lever on the other side.

With the levers in these positions, pull the drawer out until it releases from the drawer slides.

Drawer Replacement

Extend the drawer slides.

Careful align the brackets on the sides of the drawers with the slots of the cabinet slides. Insert the brackets on the side of each drawer into the slots of the cabinet slides.

Once properly inserted, completely close the drawer to set the slides into their properly functioning positions.

MAINTENANCE

Lubricate the casters once a year with high quality ball bearing grease.

Lubricate the slides twice a year with high quality, petroleum-based lubricant. This may be required more often If operating the tool box in colder climates

Use mild detergent and water to clean drawer fronts, drawer trim and other surfaces.

Grease and oil can be removed with standard, non-abrasive, non-flammable cleaning products.

Auto wax will help preserve the unit's high gloss finish. Follow directions as provided.

SAFETY



Do not attempt to lift the cabinet by its side handle using chains, ropes or lifting device. Side handle may fail resulting in personal injury or damage to the product! Use a forklift or similar lifting device with forks placed under the bottom of the tool box to move if tool box cannot be moved by two people.

<u>Close the drawers and lock the tool box before moving this product!</u> If drawers are not locked they could open and make the product unstable and tip which may cause personal injury or damage to the product.

Do NOT stand on this product or lean on the drawer or work top.

Wear safety glasses when removing or repositioning the slides. The tool box could slip resulting in personal injury.

Do NOT mount this product on a truck bed or other moving object. This may cause personal injury or product damage. Mounting this product on any surface will void the warranty.

Do NOT tow with power equipment. The product could tip which may cause personal injury or product damage.

Do NOT alter this product in any manner or attach electrical equipment. This may cause personal injury or product damage and will void the warranty.

If using the combination top chest and roller cabinet, the top chest MUST be secured to the roller cabinet by following the directions provided. Not securing the top chest to the roller cabinet may cause the product to become unstable which may cause personal injury or damage to the product.



CAUTION - IMPORTANT PRODUCT INFORMATION

DRAWERS MUST BE CLOSED AND TOOL BOX LOCKED USING KEYS BEFORE MOVING!

The maximum weight for each drawer should not exceed 100 lbs. (45 kg) for single slides and 200 lbs. (90 kg) for drawers with double slides.

Use caution when closing the chest lid. Remove hands from the area before closing to prevent personal injury.

Do NOT pull this product. Push the product to prevent personal injury.

ENGAGE THE BRAKES when not moving this product. Locked casters prevent the product from rolling which may result in personal injury or damage to the product.

This product may become unstable and tip if more than one drawer is open at a time. To prevent personal injury or damage to product, <u>OPEN ONLY ONE DRAWER AT A TIME</u>.

Lock product and properly secure before moving with a forklift or other device.

Keep the product on a level surface. The product could become unstable and tip if stored or moved on an uneven surface which may result in personal injury or product damage.

Remove the work surface from the roller cabinet before installing top chest.