



Brand: BendPak

Model: HD-7PXN 7,000-Lb. Capacity, Super-Tall Rise - NARROW

SKU: 5175518

Model: HD-7PXW (REV. M) 7,000-Lb. Capacity, Super-Tall Rise - WIDE

SKU: 5175516

BendPak's HD-7PXN and HD-7PXW are super-tall four-post lift platforms that will easily hoist 3-1/2 tons to heights exceeding 12'. Now you can store your high-profile trucks, vans and RV's and make valuable use of that wasted overhead space.

Dependable design

4 heavy-duty, high-quality, stainless steel lifting cables and a single hydraulic cylinder mounted underneath the runway makes this lift the most durable, maintenance-free lifting system on the market.

Multi-level locking positions

Each lift is equipped with multiple adjustable height locking positions for variable-height parking. A convenient push-button pneumatic safety lock control releases all four independent safety locks simultaneously.

Automatic safety locks


Aircraft-quality stainless steel and aluminum pneumatic cylinders release all 4 locks simultaneously with the simple push of a button. The spring-loaded safety locks automatically engage continuously as the lift is raised. For added safety, a secondary lock system acts as a slack-cable device to engage in the unlikely event of cable failure.



Optional Solid Deck Available

FEATURES

- 7,000 pound lifting capacity
- Extended lifting height
- Electric/hydraulic power system
- Internal "Anti-Sway" slider blocks in each column
- Features heavy-duty 3/8" aircraft cable
- Multi-position safety locks in each column
- Ramps feature non-skid surface
- Runways include rail-kit for optional accessories
- Single hydraulic cylinder underneath runway
- Oversized self-lubricating cable rollers
- Rugged 1-1/4" roller axles
- Adjustable lock ladders
- Push-button pneumatic safety release
- Optional solid deck available

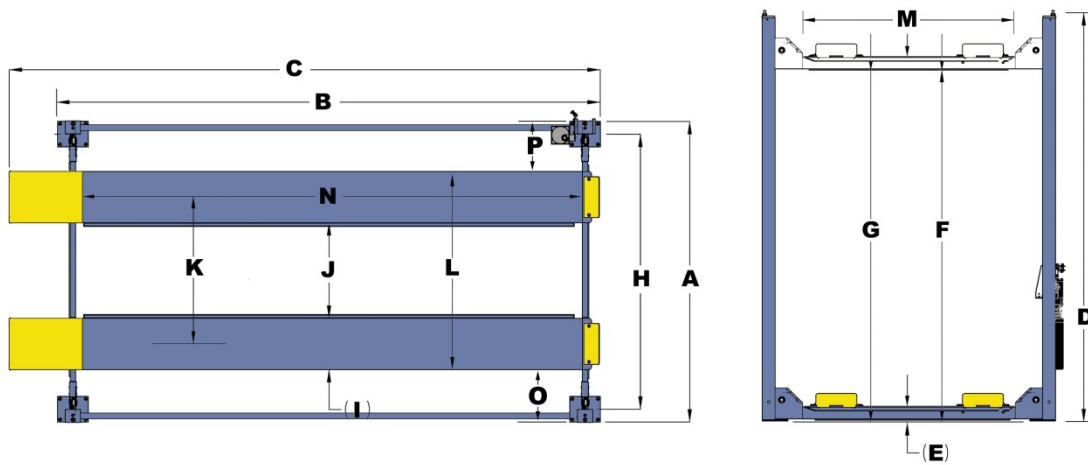

MODEL	HD-7PXN	HD-7PXW (Rev. M)
Configuration	Narrow / Super-Tall Rise	Wide / Super-Tall Rise
Lifting Capacity	7,000 Lbs. / 3175 Kg.	7,000 Lbs. / 3175 Kg.
Max Capacity / Front Axle	3,500 Lbs. / 1588 Kg.	3,500 Lbs. / 1588 Kg.
Max Capacity / Rear Axle	3,500 Lbs. / 1588 Kg.	3,500 Lbs. / 1588 Kg.
A - Overall Width	99-3/4" / 2534 mm.	110-1/4" / 2800 mm.
B - Outside Length	198" / 5029 mm.	198" / 5029 mm.
C - Overall Length	213" / 5410 mm.	213" / 5410 mm.
D - Height of Columns	158" / 4011 mm.	158" / 4011 mm.
E - Min. Runway Height	4-1/2" / 114 mm.	4-1/2" / 114 mm.
F - Max. Rise	140" / 3556 mm.	140" / 3556 mm.
G - Max. Lifting Height	145" / 3685 mm.	145" / 3685 mm.
H - Width Between Columns	89-3/4" / 2280 mm.	100-1/4" / 2,555 mm.
I - Runway Width	19" / 483 mm.	19" / 483 mm.
J - Width Between Runways (*) NARROW	37-1/2" / 952 mm.	37-1/2" / 952 mm.
J - Width Between Runways (*) WIDE	N/A	44-3/8" / 1127 mm.
K - Runway Centerline (*) NARROW	56-1/2" / 1435 mm.	56-1/2" / 1435 mm.
K - Runway Centerline (*) WIDE	N/A	63-3/8" / 1610 mm.
L - Outside Edge of Runways (*) NARROW	75-1/2" / 1918 mm.	75-1/2" / 1918 mm.
L - Outside Edge of Runways (*) WIDE	N/A	82-3/8" / 2092 mm.
M - Drive-Thru-Clearance	76-1/2" / 1943 mm.	86-1/2" / 2197 mm.
N - Length of Runways	188" / 4775 mm.	188" / 4775 mm.
Min. Wheelbase @ Rated Capacity	135" / 3429 mm.	135" / 3429 mm.
Min. Wheelbase @ 75% Capacity	115" / 2921 mm.	115" / 2921 mm.
Min. Wheelbase @ 50% Capacity	95" / 2413 mm.	95" / 2413 mm.
Min. Wheelbase @ 25% Capacity	80" / 2032 mm.	80" / 2032 mm.
Locking Positions	30	30
Lock Spacing	Every 4" / 102 mm.	Every 4" / 102 mm.
Lifting Time	60 Seconds	60 Seconds
Standard Motor (**)	208-230 VAC / 50-60 Hz. / 1Ph.	208-230 VAC / 50-60 Hz. / 1Ph.
* This dimension may be limited with the addition of rolling jacks. See rolling jack specifications on separate page.		
** Special Voltages Available Upon Request		
The design, material and specifications are subject to change without notice.		