



PRINTER FRIENDLY PAGE

Brand: BendPak**Models: XPR-9DS****Description: Floorplate Style Two-Post Lift / Screw Pad Set / Direct Drive**


The BendPak XPR-9DS Two-Post Auto Lift is a peerless direct-drive car lifting solution. This super-industrial-strength piece of equipment has got it all: leading-edge technology, top of the line materials, design that's ahead of its time and a 9,000-lb. lifting capacity. An open-top model, the XPR-9DS makes unobstructed floor-to-ceiling applications a breeze. Just the right size for shops with 13' ceilings and above.

The XPR-9DS features double-telescoping screw pads with gouge and tear-resistant polyurethane pads to help increase workplace safety and reduce operating costs. A set of our 63 mm stacking adapters included as standard accessories.

- 9,000-lb. lifting capacity
- Adjustable width design configures for wide or narrow installation
- Direct-drive lifting system eliminates chains and pulleys
- Dual hydraulic lifting cylinders
- Single-piece columns
- Single point safety release
- Drop-end arms provide a lower pad height
- Triple-telescoping arms provide increased range for lifting point access
- Electric/hydraulic power system
- Large, 20" x 19" steel base plates
- Self-lubricating dura-glide polyethylene bearing system
- Safety locks in each column spaced every 3-inches
- Automatic arm restraints
- Heavy-duty dual 3/8" equalizer cables with oversize cable sheaves
- 4-piece 63 mm stackable adapter set comes standard



MODEL	XPR-9DS
Lifting Capacity*	9,000 lbs. / 4,082 kg
*Max Capacity / Front Axle	4,500 lbs. / 2,041 kg
*Max Capacity / Rear Axle	4,500 lbs. / 2,041 kg
A - Height Overall: (*)	145" / 3,683 mm
B - Width Overall: (NARROW)	132" / 3,353 mm
B - Width Overall: (WIDE)	145" / 3,683 mm
C - Width Outside of Columns: (NARROW)	126-3/4" / 3,225 mm
C - Width Outside of Columns: (WIDE)	139-3/4" / 3,555 mm
D - Floor Pan Height:	1-3/4" / 44 mm
E - Inside Columns: (NARROW)	105" / 2,667 mm
E - Inside Columns: (WIDE)	118" / 2,997 mm
F - Reach (Front Arm Min.):	27-1/2" / 698 mm
G - Reach (Front Arm Max.):	51-1/2" / 1,308 mm
H - Reach (Rear Arm Min.):	34" / 863 mm
I - Reach (Rear Arm Max.):	54-1/2" / 1,384 mm
J - Min. Pad Height:	4" / 102 mm
K - Rise:	69" / 1,753 mm
L - Max Lift Height (Pad Only):	73" - 75" / 1854 - 1905 mm
M - Max Lift Height (Screw Pad & 63mm Adapter):	75.5" - 77.5" / 1917 mm - 1968 mm
N - Drive-Thru Clearance: (NARROW)	93" / 2362 mm
N - Drive-Thru Clearance: (WIDE)	106" / 2692 mm
Screw Pad Adjustment	2" / 51 mm.
Motor (**)	220 VAC / 60 Hz. 1Ph.
Time of full Rise:	45 Seconds
Max Load Per Arm:	2,250 Lbs. / 1021 kg

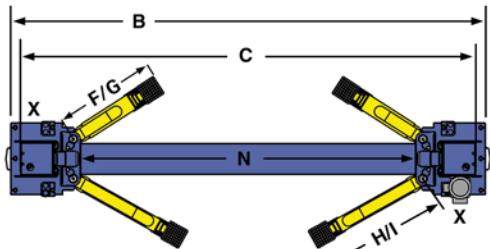

NOTE: Power unit can be located at either X location.

