

Product Description:

- 1000 Lumen rotation rechargeable lift light.
- Built-in motion sensor, when detect people movements in working area, light will automatically turn on.
Light will automatically turn off within one minute if people left working area.
- 360° Rotation base with strong magnets offers the ultimate in flexible positioning.
- Individual switches for magnetically ON/OFF, easy to install and remove the light
- On board battery fuel gauge easily informs you how much power is remaining.
- Dimmable switch with memory function, press and hold switch to activate.
- Recharge using the bi-directional USB-C connection.

Specifications:


Power Requirement:	AC100~240V 50 / 60Hz
Operating Voltage:	5V / 2A
Battery Specification:	3.7V Li-ion 10400mAh
Charging Time:	Approximately 5 hours
Run Time:	Approximately 6 hours (High brightness) Approximately 50 hours (Low brightness)
Lumens:	Approximately 1000 Lumens (High brightness) Approximately 100 Lumens (Low brightness)

Operation Instructions:

Please keep the lens clear and uncovered to avoid damage.

■ Lighting Switch:

- ① Press the switch once to turn on the light. Hold the switch to adjust the brightness output, the light will flash once when the highest or lowest output is reached.
- ② Press the switch a second time to turn off the light.

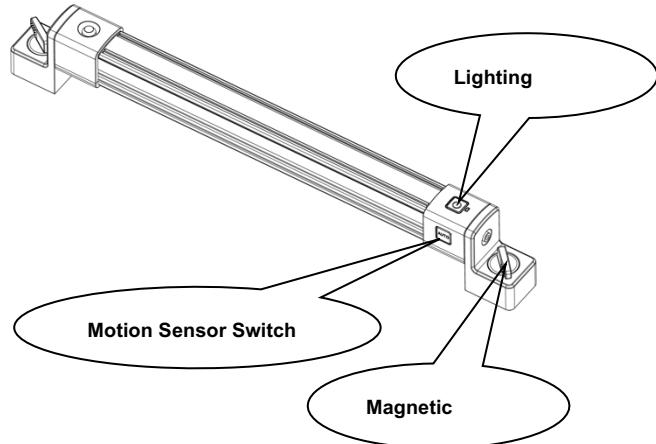

■ Motion Sensor Switch:

- ① Press the switch once to activate motion sensor function, and indicator in blue.
- ② Press the switch a second time to turn off motion sensor, blue indicator shuts off.

■ Magnetic Switch

- ① Twist the switch to ON, magnetic turns on.
- ② Twist the switch to OFF, magnetic turns off.

Battery treatment / charging:

- Charge the battery for at least 8 hours before first use.
- Battery indicator:
 - ① Charging: Green LED flash when charging; Green LED solid when charging complete
 - ② Discharging: Green>90%; Yellow: 89%-16%, Red:<15%
- Battery indicator will shut off after 15 seconds.
- Do not leave the battery in full discharged condition.
- Recharge the light at least once in every 30 days.
- Only use recommended attachments to charge the light, others may result in a risk of fire, electric shock or personal injury.
- Do not charge the light in rain, flame or wet locations.
- Always unplug charger before cleaning or maintenance.

Replacement Parts:

- EAK0361V67A-US - 5V 2A USB-C Charger & Cable



- Wear safety goggles. (User and bystander).
- Avoid looking directly into the beam.
- Do not use the lamp near open flames.
- Always fully charge to extend battery life.
- The lamp may get hot in the vicinity of the light outlet. Therefore, please maintain a lighting distance at least 10cm.

Warranty/Service:

- 1 year warranty covering defects in material and workmanship