
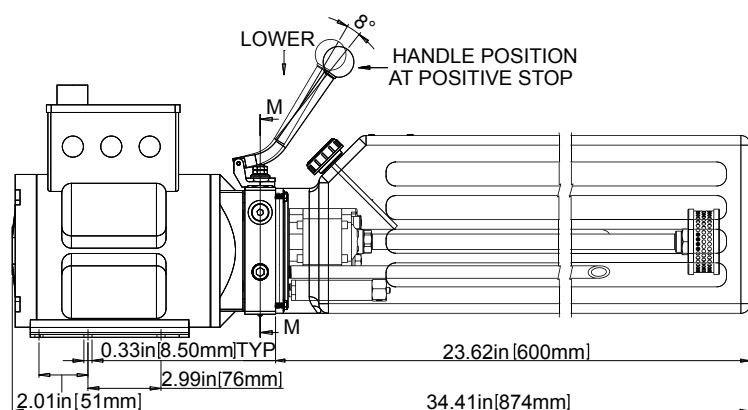
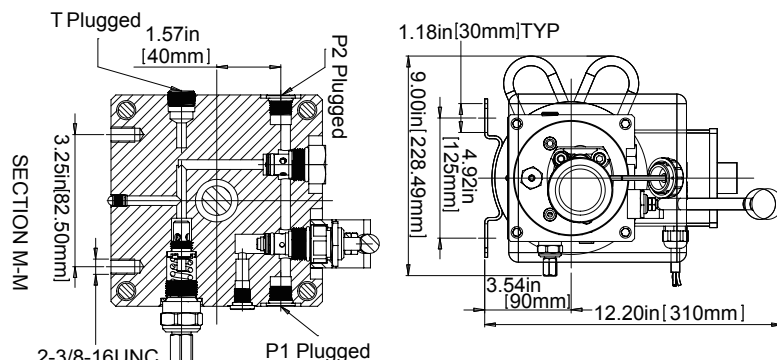


MODEL AL3500

ALLY

2HP 230V AC HYDRAULIC POWER UNIT WITH POWER UP AND GRAVITY DOWN FUNCTIONS FOR ABOVE GROUND VEHICLE LIFTS

This unit is used for raising and lowering your hoist. A push of a button raises the lift and a manual control allows for controlled lowering. This unit features a fixed pressure relief valve and 3.6 GAL opaque tank.

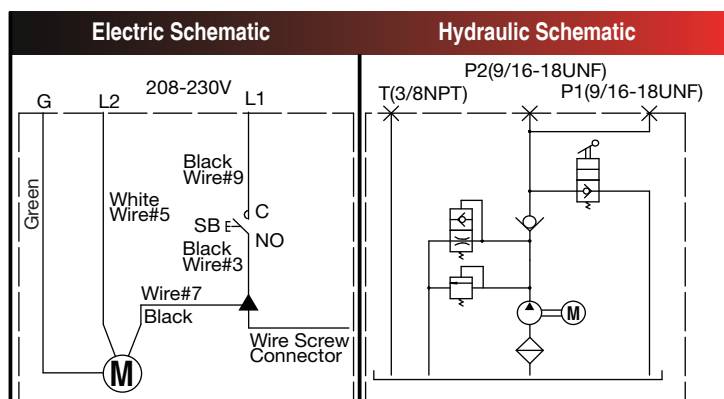

UNIT SPECIFICATION	
Lowering Valve	Manual operated
Buffer Valve	Z1/4
Pressure Relief Valve	3500PSI (+/-100PSI) ,Pre-set
Check Valve	M20x1.5
Motor	208-230V, 1PH, 50/60HZ, 2930/3520rpm, 2.0HP, MET recognized/UL 201/CSA C22.2 NO.68
Gear Pump	2.1cc/r 2gpm
Suction Filter	100 mesh
Tank	3.6 gallon, Usable, OPAQUE, Plastic

MODEL AL3500		ITEM	DESCRIPTION	P/N	QTY.
		1	Motor	WG-03-1G011	1
		2	Lowering Valve	WX2-01-4010	1
		3	Check Valve	WG-05-1001	1
		4	Pump Body	BCP2-01-007	1
		5	Pressure Relief Valve	WX2-01-2017	1
		6	Plug M10x1	WG-04-3013	1
		7	Plug 9/16-18	WG-04-3019	2
		8	O-ring 8x2.1	WG-01-2073	1
		9	O-ring 11.8x1.8	WG-01-2010	2
		10	Gear Pump	CP1-01-007Q2	1
		11	Screw	SPZL000100	4
		12	Coupling	WX2-04-002	1
		13	Pump Mounting Bolt	WG-01-1048	2
		14	Suction Tube	WX2-02-1010	1
		15	Return Tube	WX2-02-2005	3
		16	O-ring 109x5.3	WG-01-2049	1
		17	Tank	WG-06-2016	1
		18	Hex screws M5x18	WG-01-1260	4
		19	Flat washers 5	WG-01-1066	4
		20	Buffer valve	WX2-01-6002	1
		21	Plug NPT3/8	WG-04-3020	1
		22	Ball plug	WG-01-3227	1
		23	Filter	WG-07-002	1
		24	Lock washers 8	WG-01-1009	2
		25	Switch Cover	WG-03-3336	1
		26	Motor switch	WG-03-3335	1
		27	Junction box cover	WG-03-3337	1