

R138SHOP

2D LOW ROTATION SPEED

FIRST LEVEL COMPUTERIZED BALANCER

Motorized balancer at a great value compliments any shop.

Its small footprint and lower rotational speed offers features even the most demanding operator will appreciate. A heavy-duty 40mm shaft, large 10.5" offset for deep rims, easy to read display and standard accessories completes this great package.

PROGRAM FEATURES



AUTO STOP ON TOP AUTO LOCK

Automatic start when the cover is lowered and automatic stop of the wheel in the external unbalanced position.



CALIPER FOR AUTOMATIC DISTANCE + DIAMETER MEASUREMENT

Automatic ALU S program



Includes **HIDDEN WEIGHT** program

STANDARD ACCESSORIES



GAR 111
Passenger tire cone kit
1.75" - 4" (44-104 mm)



GAR 112
Light truck cone
3.75" - 5" (95-124 mm)



GAR 101
Quick nut
replacement lock

Caliper
and Pliers



**LARGE DIGITAL
DISPLAY**



Wheel diameter: 10" - 26"
Tire width: 1.5" - 22"
Maximum tire diameter: 35.4"

R138 SHOP 2D services:



Optional equipment may be required


DIMENSIONS:
HEIGHT: 46.5" / 62.875" with hood up
WIDTH: 39.5"
DEPTH: 29.125"

TECHNICAL DATA	R138
Maximum assembly weight	143 lbs. (65kg)
Read out accuracy	1 g
Cycle time	6 seconds
Rotation speed (rpm)	<100
Power supply	110v / 60 Hz / 1Ø

OPTIONAL ACCESSORIES / R180 / R155 / 148 / 138 BALANCERS



GAR113
Light truck cone
4.65" - 6.8" (118-174mm)
Vans and light trucks

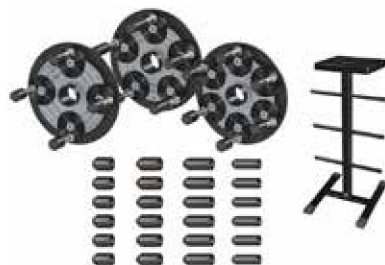

SHOWN: HW210400002
Series IV Quick Plate Kit 40mm

HW200299409
North American Flange Plate Kit 40mm



GAR124 Spacer for all balancers
May be used with GAR112 and the #8, 9, 10 & 11 collets

HW150400110 2.07" - 4.76" (52.5mm-122mm) Nine-piece Pro Collet Kit 40mm

- Clad Wheel Problem Solver
- Static Imbalance Solution
- Lower Taper For Better Mounting Surface with No Wheel Hub Interference
- Includes collets #1 thru #9



GAR324 Wheel lift with automatic compensation of wheel weight
Memorizes wheel weight - when the wheel is removed from the balancer, there are no forces on balancer shaft.