

MID-RISE SCISSORS PORTABLE LIFT

This mid-rise, portable lift is an excellent choice for a low ceiling tire shop or service center that wants to get a passenger car or light SUV lifted as quickly as possible. The EM06 model raises vehicles to a full 40". Simply drive the vehicle over the approach ramps and place the rubber support blocks under the vehicle's lifting points.



EM06

Main Features

- ✓ Advanced Hydraulic Safety Locks instead of the traditional mechanical locks.
- ✓ Hydraulic cylinders with a built-in flow restrictor adds stability and smooth lowering.
- ✓ Adjustable approach ramps can quickly extend the length of the platform.
- ✓ Can be made portable by using the optional dolly, kit No.:EM002



Adjustable approach ramps quickly extend the length of the platform.




Two hydraulic cylinders and hydraulic safety locks.



Both 1 1/2" and 3" height rubber pads are included as a standard issue.

SPECIFICATIONS

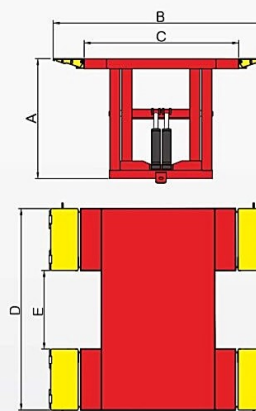

Model		EM06
Lifting Capacity		6,000lbs (2800kg)
Lifting Time		26S
Lifting Height	A	41 3/4" (1060mm)
Minimum Height		4 1/8" (105mm)
Overall Length	B	80" (2030mm)
Runway Length	C	57 1/2" (1460mm)
Overall Width	D	77 1/8" (1960mm)
Width Between Runway	E	30" (760mm)
Gross Weight		1,202lbs (545kg)
Motor		2.0HP,220V/60Hz,single phase

AMGO HYDRAULIC CORPORATION

SC Division: 1931 Joe Rogers Jr Blvd, Manning, SC 29102, USA
Tel:(803)505-6410

TX Division: 4310 Adler, Suite 200, Dallas, TX 75211, USA